
Important - please read first

If you've upgraded to Moneyworks v7.1.9, please download and install an updated version of the Moneyworks component:

- If you're using a recent version of the Connector (newer than October 2013), download the v13 version of the component here, otherwise download the v12 version here (or contact us to upgrade to the v13 version first).
 - To determine which version you have, right-click on MoneyworksConnector.exe, select Properties → Details
 - This example is v12.2

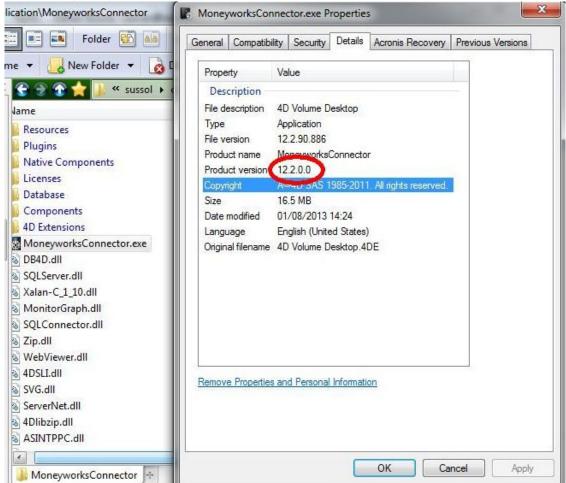

- Extract the contents of the downloaded zip file to somewhere on your hard disk
- Stop the Connector
- Copy the entire Sussol_Moneyworks.4dbase folder extracted from the zip file into the Components folder where the Connector has been installed, overwriting the existing folder of the same name

Name	Size	Modified 🔻	Туре
Sussol_Moneyworks.4dbase		20/04/2014 20:59	File Folder
4D Widgets.4dbase		20/04/2014 20:59	File Folder
4D SVG.4dbase		20/04/2014 20:59	File Folder

Restart the Connector

Introduction

This is a standalone application (Windows or Mac) using our Moneyworks component which is designed to periodically (or manually) connect to Magento and import transactions into Moneyworks. Transctions may be imported as sales orders, sales invoices or receipts, depending on the customisation code entered and/or the import map used.

We call this process 'syncing', and it is controlled by the *Sync* menu items:

S NaxeyworksConsector			
File Edit Mode State Help			and the second
Custanisation cade Sunc with Honeyworks Setue			
	Replication		
		00	
		sustainable solutions	
		solutions	
		Alexand Markes Cald	
		MoneyWorks Gold	
	1 A 4		

There are also some customised versions of the Connector which connect to MySQL databases, either directly or via an API. It can also be customised to support other ecommerce platforms e.g. Prestashop. Please contact us for more details if you're interested.

Entering the customisation code

Available from the Sync \rightarrow Customisation code menu item. This code determines which options are available and must be entered first to enable the other menu items.

By default, the Connector works on the basis that all customers and products have the same codes in Magento and in Moneyworks. However, it is also possible to allow customers to be automatically created in Moneyworks if they don't already exist. By default, the Connector uses both name and code to determine if there's a match for either.

Setting up the sync parameters

Available from the Sync \rightarrow Setup menu item. This consists of five tabs with settings for the Moneyworks connection and Magento connection parameters, and also some Moneyworks-specific options and advanced options to control the sync process.

Moneyworks connection

This tab controls how the Connector connects to Moneyworks:

Moneyworks connection	Moneyworks test Magento connection Moneywor	ks settings Other settings	Connection 1 v
Connection type Datafile location (or	DC client v	lf on Gold server Gold client license key	
filename if on Datacentre/Gold server) Moneyworks location	C:\Program Files (x86)\MoneyWorks Gold	lf on Datacentre/Gold server IP address Port number (leave blank for default)	192.168.1.68
Doc user name Doc pass	admin *****	If on Datacentre DC user name DC pass Operating system of DC	DC ****** Windows
			Cancel OK

It allows you to enter the parameters for the Moneyworks connection:

- The connection type can be Local file, Gold client, Datacentre client, or Datacentre REST client (e.g. Moneyworks NOW).
- The datafile location or filename must be entered (full path must be entered if a local file).
- The location of the Moneyworks executable must be entered, unless the connection is via REST.
- Enter the document user name and password (even if blank) in all cases.
- The Gold client license key is only needed if connecting to a Gold server.
- The server IP address and port number are not needed for connecting to a local file.
- The DC user name and password should be entered (even if blank) if connecting to a Datacentre or Datacentre REST server. If it's a Datacentre REST server connection, you can specify if the connection is secure or not; if it's a regular Datacentre server connection, the operating system of the Datacentre server must be selected.

Last update: 2016/10/06 16:04	moneyworks:magento_integration http://docs.sussol.net/doku.php/moneyworks:magento_integration?rev=1475769851

Moneyworks connection	Moneyworks test Magento connection Moneywor	ks settings Other settings	Connection 1 v
Connection type	DC REST client v	If on Gold server Gold client license key	
Datafile location (or filename if on	Backup of test file.mwd7 Choose	If on Datacentre/Gold server	
Datacentre/Gold server) Moneyworks location	C:\Program Files (x86)\MoneyWorks Gold	IP address Port number (leave blank for default)	192.168.1.68
Doc user name	admin	If on Datacentre	
Doc pass	*****	DC user name	DC
		DC pass DC REST connection	
		De Rest connection	SSL ~
			Cancel OK
			ii.

By default, there is a single connection to the Magento database, but for some customisations of the Connector it is possible to have multiple Magento connections e.g. you may want to apply different rules and settings for different Magento stores and/or sync them to different Moneyworks data files. If this is the case, you'll be able to switch connection settings using the drop-down list at the top right. Please contact us for more details if you're interested.

Moneyworks test

The second tab allows you to send commands to Moneyworks (see the Moneyworks CLI manual for details), and you can use the examples in the *Input* drop-down menu to check that the connection is setup correctly e.g. selecting *evaluate expr="documentpath"* and then clicking on the *Execute* button should return the Moneyworks document name/path in the *Output* box (and nothing in the *Errors* box). Clicking on *OK* will save the current connection settings, and *Cancel* will discard any changes made. Note that you should avoid using normal single quotes here as these are used internally to pass the commands to Moneyworks.

Moneyworks connection Moneyworks test Magento connection	n Moneyworks settings Other settings	Connection 1 \sim
Input	Errors	
export table= "Name" format= "[Code] \n" search= "I $ \lor $		
export table="Name" format="[Code]\n" search="left(code,3)=`amp`"		
Output		
AMPT001 AMPT002		
Execute		Cancel OK

For REST connections, the commands need to be formatted appropriately using the correct URL structure and using standard HTTP escape sequences - see the Moneyworks REST documentation for details.

Moneyworks connection Moneyworks test Magento connection	Moneyworks settings Other settings	Connection 1 v
Input export/table=Name&format=[Code]\n&search=Ie export/table=Name&format=[Code]\n&search=Ieft(code ,2]%3D'ac`	Errors	
Output		
ACTRIMS ACC		
Execute	~	Cancel OK

Magento connection

This tab controls how the Connector connects to Magento:

Last update: 2016/10/06 16:04moneyworks:magento_integration http://docs.sussol.net/doku.php/moneyworks:magento_integration?rev=147576
--

						×
Moneyworks connection	Moneyworks test Magento con	nection Money	vor	ks settings Other settings	Connection 1	~
User name Password/key IP address or host name	test-store.net]]		
Use SSL						
Store ID	Store name	Include				
1			\sim			
2	Tudanda tangan shine					
3	Colorestation .					
			~	Reload		
<		>		Reload		
Test					Cancel OK	

- Enter user name and password (API key) as supplied by the Magento site administrator.
- Enter the IP address or hostname of the Magento site.
- If a secure connection is required, check Use SSL.

Click on the *Test* button to verify the connection. Clicking on *OK* will save the current connection settings, and *Cancel* will discard any changes made.

If your customisation allows multiple connections, you'll be able to select which stores are synced for each connection. Clicking the *Reload* button will reload the list of stores from Magento.

Moneyworks settings

This tab allows you to customise how imported records appear in Moneyworks. When it is selected, the system attempts to read tax codes and shipping codes from the Moneyworks data file:

						[- • ×
Moneyworks connection	Moneyworks test Ma	gento connection	Moneyworks settings	Other settings		Connection 1	\sim
Highlight colour	Cyan 🗸 🗸 🗸						
Base currency code	NZD						
Default tax code	G 🗸						
Default customer code	WEBCUST						
Use Moneyworks address for existing customers							
Order/invoice sequence	W0000000						
Customer sequence	W000000						
Shipping							
Shipping code	SHIPPING \lor						
Shipping tax code	G ~						
					Ca	ancel	ОК

7/11

- Highlight colour controls how the imported records are coloured in Moneyworks.
- Base currency code should correspond to the base currency in the Moneyworks data file.
- The default and shipping tax codes are applied to orders which have a non-zero tax amount in Magento, otherwise the tax code is set to blank.
- Default customer code specifies which customer code in Moneyworks should be used for generic/casual orders which don't have their own customer code in Magento. Obviously, this customer code should already exist in Moneyworks.
- If *Use Moneyworks address for existing customers* is checked, then the mailing address is not passed across from Magento for customers which have their own customer code. If the customer is defined as a company in Magento, then the delivery address is not passed across either.
- If required, you can define a mask for the order/invoice sequence numbers e.g. "W00000000" means that transactions will be assigned a sequence number of "W00000001" and so on, depending on the numeric value of the Magento ID.
 - If left blank, Moneyworks will use the ID assigned by Magento.
 - Depending on the customisation code entered, the same facility is available for assigning new customer codes.
 - Note that there is a limit of 11 characters in Moneyworks for transaction and customer codes, so this determines the maximum length of the mask.
 - Note that the numeric part of the Magento ID must not be longer than the number of trailing zeroes in the mask, otherwise it won't fit into the space available. The Connector will attempt to append extra trailing zeroes up to the maximum length of the mask - if that fails, then it reverts back to the original Magento ID.
- If set, the *Shipping code* is applied to all orders which have a non-zero shipping amount in Magento. This will normally be shown as an extra line in the invoice.

Note that most of these settings can be overridden by using a customised Moneyworks import map e.g. it may be necessary to have different tax codes for different transaction currencies, different types of product or different shipping destinations. In this case, the tax codes should be left blank here, and the connector will use the tax amounts as entered in Magento to work out which tax code to apply on a per-line basis.

Other settings

This tab controls the sync process itself:

Moneyworks connection Moneyworks	test Magento connection Mor	neyworks settings Other settin	js	Connection 1 \sim
Syncing				
Magento sync timestamp	2016-05-15 14:57:40			
Moneyworks sync timestamp	2016-05-23 15:48:52			
Sync interval (minutes)	0			
Debugging				
Generate CSV import files				
Updating				
Action if record modified on	O Use Moneyworks			
both Magento and Moneyworks since last sync	Use Magento Prompt user			
Don't update existing Moneyworks records				
Notifying				
Email address for notifications	notify@email.com			
Don't notify Sustainable Solutions				
				Cancel OK

- The Magento and Moneyworks sync timestamp fields control which records are imported into Moneyworks (and can be manually edited if needed e.g. to ignore failed records before a certain date):
 - Both refer to the local time on the Magento and Moneyworks server respectively (they can be in different time zones). By default, Magento runs on the UTC time zone.
 - When a sync process has completed without errors, both timestamps are updated so that the records are not re-imported the next time (records imported into Moneyworks store the corresponding Magento timestamp in one of the user/custom fields).
 - If there is an error, then the sync timestamps are not updated, and the next sync will retry to import the failed record(s), and skip any which have previously been imported successfully.
- If the *Sync interval* is set to any value other than zero, the Connector will automatically attempt to perform a sync every X minutes. In this case, error messages are redirected to the log file (in the *Logs* folder) instead of popping up on the screen.
- If *Generate CSV import files* is checked, the connector won't delete the temporary CSV import files that it generates (in the *Database/Resources/Moneyworks_import* folder). These can be useful to diagnose problems as you can manually import them into Moneyworks (using the corresponding import maps in the *Resources* folder).
- In some circumstances, it is possible for the same record to have been modified both on Magento and in Moneyworks since the last time it was synced. You can choose to automatically use the Magento changes or the Moneyworks changes, or to be prompted each time there is a conflict.
- If Don't update existing Moneyworks records is ticked, then an existing record will not be updated in Moneyworks even if it has been updated on Magento, regardless of the choice above, but a warning message will be generated in the log file.
- If an email address has been entered in Email address for notifications, an automatic email

containing the contents of the log file will be sent if there are any errors or warnings.

- If no email address has been entered, or the Don't notify Sustainable Solutions box has not been ticked, and there are errors, Sustainable Solutions will also get a copy of the email.
- Note that there is a throttle in place to prevent another error email being sent less than an hour since the previous one unless it also contains a warning.

Initial setup of Moneyworks datafile

- Make sure that the item codes in Moneyworks are the same as those in Magento.
- Make sure that the customer codes in Moneyworks are the same as those in Magento.
- Make sure that there are open periods in Moneyworks for all of the transactions that you want to import from Magento.
- Make sure that there is at least one shipping method defined in Moneyworks, and that the "we sell this" box is checked.
- Make sure that the base currency in Moneyworks has been set correctly.
- Make sure that the tax codes in Moneyworks have been setup correctly, with the same rates as in Magento.

Common errors

- No period has been opened in Moneyworks for a new transaction
- If you're connecting to a local datafile, make sure it isn't already open in Moneyworks
- Mismatch between the item codes in Moneyworks and those in Magento

When an import fails, then the next sync will restart from the same point as the previous one, so any records deleted in Moneyworks may magically be resurrected!

- This will likely generate informational messages in the log file for any records which were successfuly imported the last time.
- Regardless of the sync interval setting on the *Other Settings* tab, there will not be more than one error email per hour, unless the log file also contains a warning.
- If the import error cannot be fixed, then it can be ignored by manually setting the Magento timestamp on the *Other Settings* tab to a time after the timestamp of the offending record.

Troubleshooting

- Check the log file created for each sync in the *Database/Logs* folder. Error messages, which
 prevent the timestamps from being updated, will be prefixed by "Error:", and warning
 messages will be prefixed by "Warning:". Error and/or warning messages will generate an email
 according to the notification settings on the *Other Settings* tab.
- 2. Switch on *Generate CSV import files* on the *Other Settings* tab. This creates CSV files in the *Database/Resources/Moneyworks_import* folder, which can then be manually imported into Moneyworks using corresponding import map in the *Database/Resources* folder.
- Enable XML debugging (enter "debug_xml_on" as a customisation code, and "debug_xml_off" to switch it back off again). This creates XML files for each Magento API call in the Database/Resources/Moneyworks_import folder.

- 1. If the Connector is configured to use a REST connection, enabling XML debugging will also create XML import files in the
 - Components/Sussol_Moneyworks.4dbase/Resources/Moneyworks_import folder.
- 2. These XML files can then be manually imported into Moneyworks, either directly in Moneyworks or by making use of the *Execute* button on the *Moneyworks test* tab.

Appendix: Magento API fields used by Connector

- customer.info.customer_id
- customer.info.firstname
- customer.info.lastname
- customer.info.middlename
- sales_order.info.billing_address.city
- sales_order.info.billing_address.country_id
- sales_order.info.billing_address.postcode
- sales_order.info.billing_address.street
- sales_order.info.increment_id
- sales_order.info.payment.additional_data
- sales_order.info.payment.method
- sales_order.info.shipping_address.city
- sales_order.info.shipping_address.company
- sales_order.info.shipping_address.country_id
- sales_order.info.shipping_address.postcode
- sales_order.info.shipping_address.street
- sales_order.list.customer_firstname
- sales_order.list.customer_id
- sales_order.list.customer_lastname
- sales_order.list.customer_middlename
- sales_order.list.order_id
- sales_order.list.state
- sales_order_invoice.info.created_at
- sales_order_invoice.info.grand_total
- sales_order_invoice.info.increment_id
- sales_order_invoice.info.invoice_id
- sales_order_invoice.info.items.discount_amount
- sales_order_invoice.info.items.item_id
- sales_order_invoice.info.items.name
- sales_order_invoice.info.items.qty
- sales_order_invoice.info.items.row_total
- sales_order_invoice.info.items.row_total_incl_tax
- sales_order_invoice.info.items.sku
- sales_order_invoice.info.items.tax_amount
- sales_order_invoice.info.order_currency_code
- sales_order_invoice.info.order_id
- sales_order_invoice.info.order_increment_id
- sales_order_invoice.info.shipping_amount
- sales_order_invoice.info.shipping_tax_amount

- sales_order_invoice.info.state
- sales_order_invoice.info.store_id
- sales_order_invoice.info.updated_at
- sales_order_invoice.list.increment_id
- sales_order_invoice.list.order_id
- sales_order_invoice.list.updated_at

From: http://docs.sussol.net/ - **Sussol Docs**

Permanent link: http://docs.sussol.net/doku.php/moneyworks:magento_integration?rev=1475769851

Last update: 2016/10/06 16:04

